


## Chapter 5: Jumper Settings

KATRON

E T - 3 2 P C I

<b>NIC Type</b>	Ethernet
<b>Transfer Rate</b>	10Mbps
<b>Data Bus</b>	PCI
<b>Topology</b>	Linear Bus/Star
<b>Wiring Type</b>	Unshielded twisted pair RG-58A/U 50ohm coaxial
<b>Boot ROM</b>	Not available

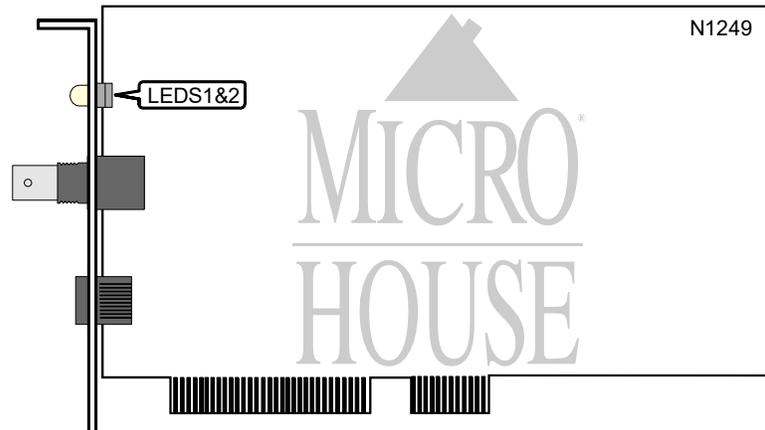

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	10Base-T polarity is reversed
LED1	Off	10Base-T polarity is normal
LED2	On	10Base-T network connection is good
LED2	Blinking	10Base-T network connection is faulty
LED2	Off	10Base-T network connection is broken