


# IBM CORPORATION PC NETWORK ADAPTER (BROADBAND)

<b>NIC Type</b>	Broadband
<b>Transfer Rate</b>	Unidentified
<b>Data Bus</b>	8-bit ISA
<b>Topology</b>	Star
<b>Wiring Type</b>	RG-11A/U RG-59A/U coaxial
<b>Boot ROM</b>	Not Available

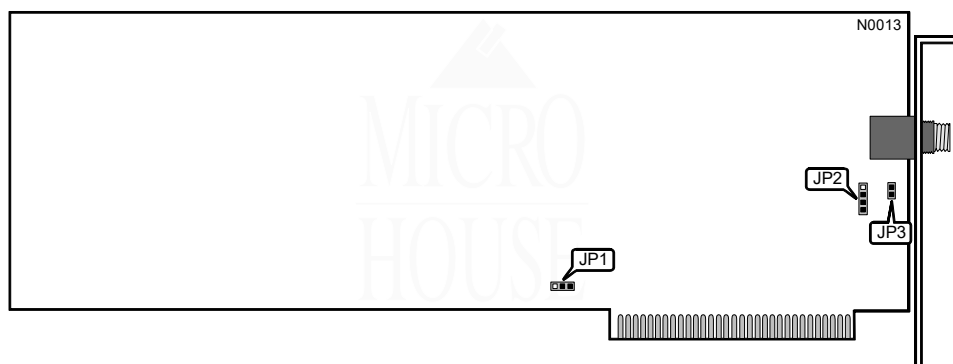

INTERRUPT REQUEST SELECTION	
IRQ	JP1
2	Pins 2 & 3 Closed
3	Pins 1 & 2 Closed

I/O ADDRESS SELECTION	
Address	JP2
360h	Pins 2 & 3 closed
368h	Pins 1 & 2, 3 & 4 closed

ROM BIOS CONFIGURATION	
Setting	JP3
iEnabled	Closed
Disabled	Open

MISCELLANEOUS TECHNICAL NOTES
The DMA channel is permanently fixed at 3. If two adapters will be installed into one station then disable the ROM BIOS on the second adapter.