


IBM CORPORATION

EASY OPTIONS CD-ROM DRIVE CD650

Card Type	CD-ROM interface card
Chip Set	Unidentified
Maximum Onboard Memory	N/A
I/O Options	CD-ROM audio, CD-ROM interface (2), speaker out
Data Bus	8-bit ISA
Floppy drives supported	N/A

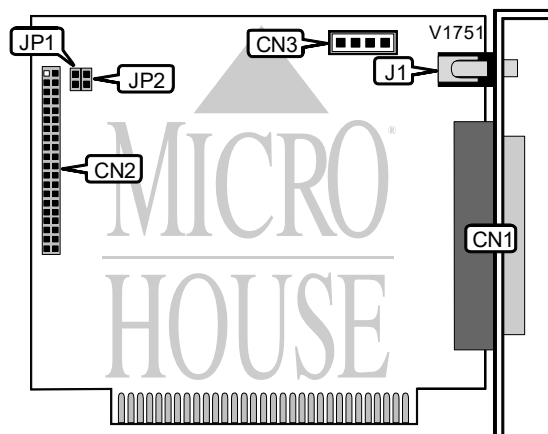

CONNECTIONS			
Function	Label	Function	Label
External CD-ROM interface	CN1	CD - audio in	CN3
CD-ROM interface	CN2	Speaker out	J1

CD-ROM ADDRESS CONFIGURATION		
Address	JP1	JP2
250h	Closed	Open
260h	Open	Closed