


Chapter 5: Jumper Settings

COMPEX, INC.

ANET 16 - MC

NIC Type Arcnet
Transfer Rate 2.5Mbps
Data Bus 16-bit MCA
Topology Linear Bus/Star
Wiring Type Unshielded twisted pair
 RG-58A/U 50ohm coaxial
Boot ROM Available

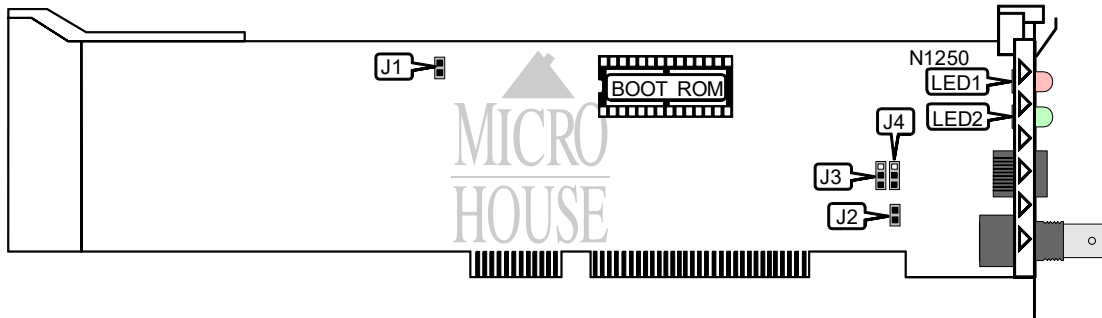

CABLE TYPE SELECTION		
Cable Type	J3	J4
RG-58A/U 50ohm coaxial	pins 2 & 3 closed	pins 2 & 3 closed
Unshielded twisted pair	pins 1 & 2 closed	pins 1 & 2 closed

MODE CONFIGURATION	
Type	J1
TRXnet	Closed
COMPEX	Open

BUS TYPE SELECTION	
Select	J2
Star	Closed
Linear Bus	Open

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Red	On	Network connection is good
LED1	Red	Off	Network connection is broken
LED2	Green	On	Data is being transmitted/received
LED2	Green	Off	Data is not being transmitted/received