


Chapter 5: Jumper Settings

COGENT DATA TECHNOLOGIES, INC.

EMASTER+ EM110 T4 EISA COMBO

NIC Type	Ethernet
Transfer Rate	10/100Mbps
Data Bus	EISA
Topology	Linear Bus/Star
Wiring Type	Shielded twisted pair
	Unshielded twisted pair
	RG-58A/U 50ohm coaxial
Boot ROM	Not available

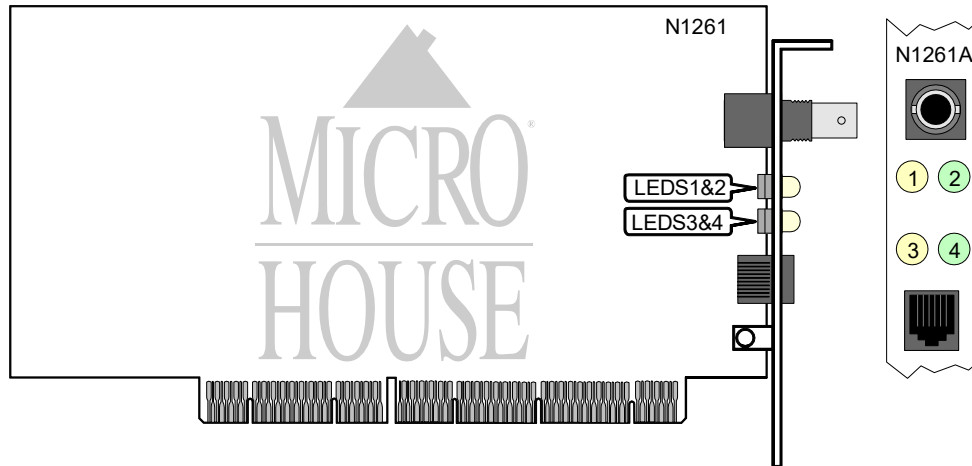

Continued next page...

THE NETWORK INTERFACE CARD TECHNICAL GUIDE
COGENT DATA TECHNOLOGIES, INC.
EMASTER+ EM110 T4 EISA COMBO

... continued from previous page.

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Yellow	On	Network activity is detected at 10Mbps
LED1	Yellow	Off	Network activity is not detected at 10Mbps
LED2	Green	On	10Base-T network connection is good at 10Mbps
LED2	Green	Off	10Base-T network connection is broken at 10Mbps
LED3	Yellow	On	Network activity is detected at 100Mbps
LED3	Yellow	Off	Network activity is not detected at 100Mbps
LED4	Green	On	10Base-T network connection is good at 100Mbps
LED4	Green	Off	10Base-T network connection is broken at 100Mbps