Chapter 5: Jumper Settings

COMPEX, INC.


READYLINK ENET100-VG4 PCI(VER.1.3C)

Ethernet 10/100Mbps NIC Type Transfer Rate Data Bus PCI

Topology Wiring Type Star

Unshielded twisted pair

Boot ROM Available

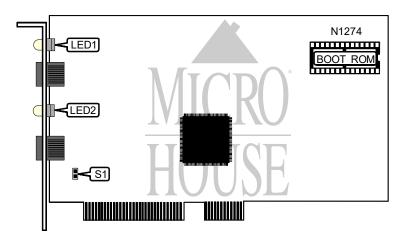

CONNECTION		
Purpose Location		
External LED connector	S1	

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Network connection is good at 100Mbps
LED1	Off	Network connection is broken at 100Mbps
LED2	On	Network connection is good at 10Mbps
LED2	Off	Network connection is broken at 10Mbps