


Chapter 5: Jumper Settings
COMPEX, INC.
READYLINK ENET100-VG4 EISA(VER.1.3C)

| | |
|----------------------|-------------------------|
| NIC Type | Ethernet |
| Transfer Rate | 10/100Mbps |
| Data Bus | 16-bit EISA |
| Topology | Star |
| Wiring Type | Unshielded twisted pair |
| Boot ROM | Available |

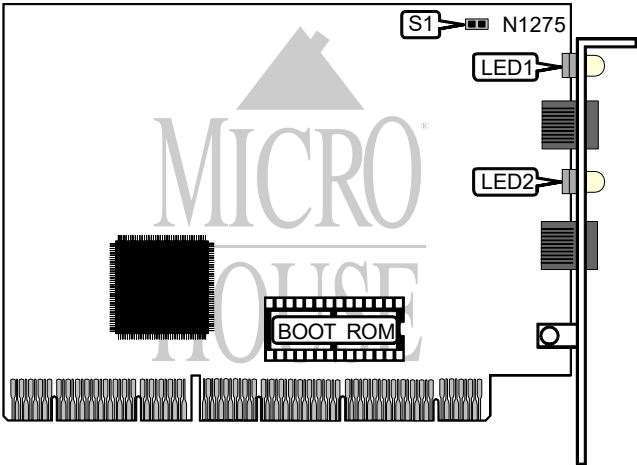

| CONNECTION | |
|------------------------|----------|
| Purpose | Location |
| External LED connector | S1 |

| DIAGNOSTIC LED(S) | | |
|-------------------|--------|-----------------------------------------|
| LED | Status | Condition |
| LED1 | On | Network connection is good at 100Mbps |
| LED1 | Off | Network connection is broken at 100Mbps |
| LED2 | On | Network connection is good at 10Mbps |
| LED2 | Off | Network connection is broken at 10Mbps |