


Chapter 5: Jumper Settings
COMPEX, INC.
READYLINK ENET100-VG4 ISA(VER.1.3C)

NIC Type	Ethernet
Transfer Rate	10/100Mbps
Data Bus	16-bit ISA
Topology	Star
Wiring Type	Unshielded twisted pair
Boot ROM	Available

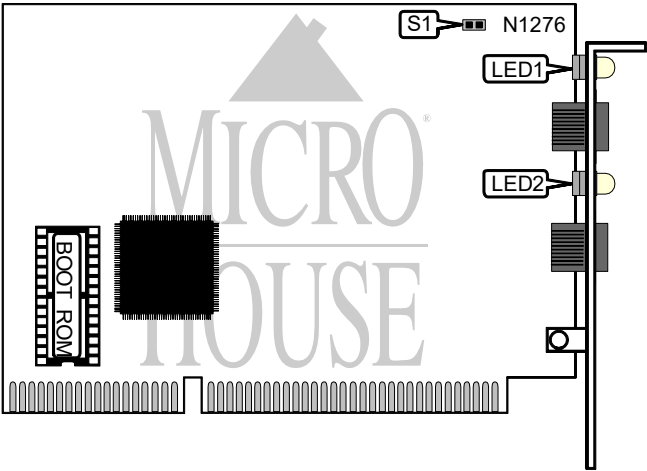

CONNECTION		
Purpose		Location
External LED connector		S1

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Network connection is good at 100Mbps
LED1	Off	Network connection is broken at 100Mbps
LED2	On	Network connection is good at 10Mbps
LED2	Off	Network connection is broken at 10Mbps