



Chapter 5: Jumper Settings
STANDARD MICROSYSTEMS CORPORATION
ETHER 10/100 SMC9232DST

NIC Type	Ethernet
Transfer Rate	10/100Mbps
Data Bus	EISA
Topology	Star
Wiring Type	Shielded twisted pair Unshielded twisted pair
Boot ROM	Available

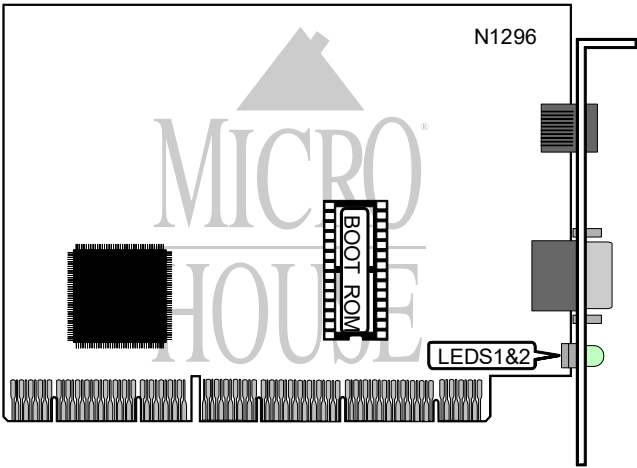

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	Network connection is good
LED1	Green	Off	Network connection is broken
LED2	Amber	Blinking	Data is being transmitted/received
LED2	Amber	Off	Data is not being transmitted/received