


**Chapter 5: Jumper Settings**  
**STANDARD MICROSYSTEMS CORPORATION**  
**ETHERPOWER 10/100 SMC9332DST**

<b>NIC Type</b>	Ethernet
<b>Transfer Rate</b>	10/100Mbps
<b>Data Bus</b>	32-bit PCI
<b>Topology</b>	Star
<b>Wiring Type</b>	Shielded twisted pair Unshielded twisted pair
<b>Boot ROM</b>	Not available

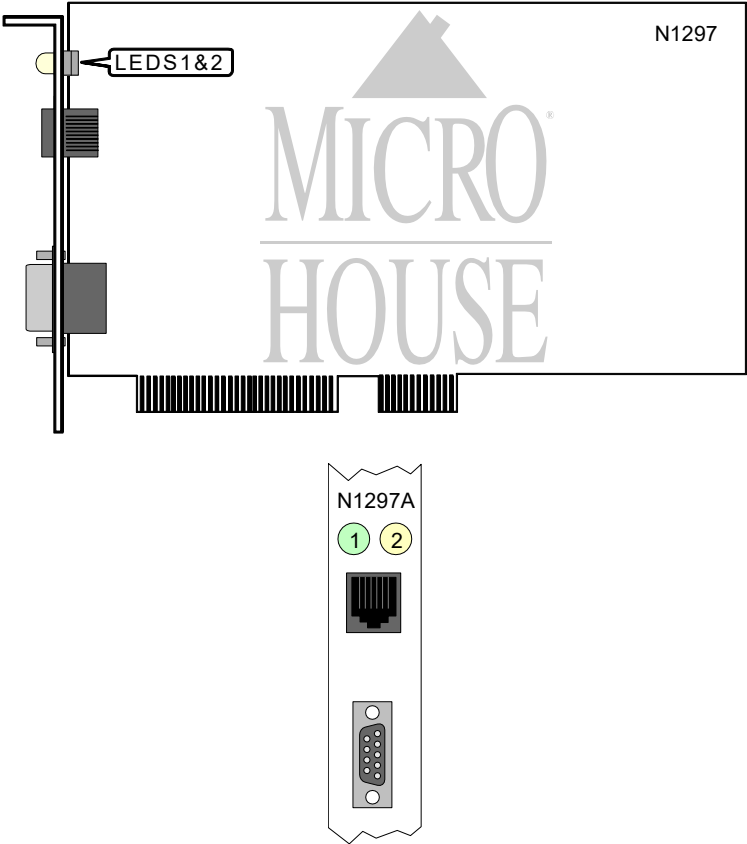

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	Network connection is good
LED1	Green	Off	Network connection is broken
LED2	Amber	Blinking	Data is being transmitted/received
LED2	Amber	Off	Data is not being transmitted/received