
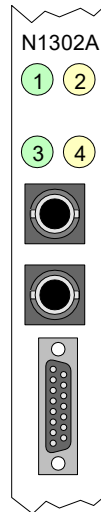


**Chapter 5: Jumper Settings**  
**STANDARD MICROSYSTEMS CORPORATION**  
**ELITECARD PLUS ELITE32**

<b>NIC Type</b>	Ethernet
<b>Transfer Rate</b>	10Mbps
<b>Data Bus</b>	32-bit EISA
<b>Topology</b>	Linear Bus
<b>Wiring Type</b>	AUI Transceiver via DB-15 port RG-58A/U 50ohm coaxial
<b>Boot ROM</b>	Not available

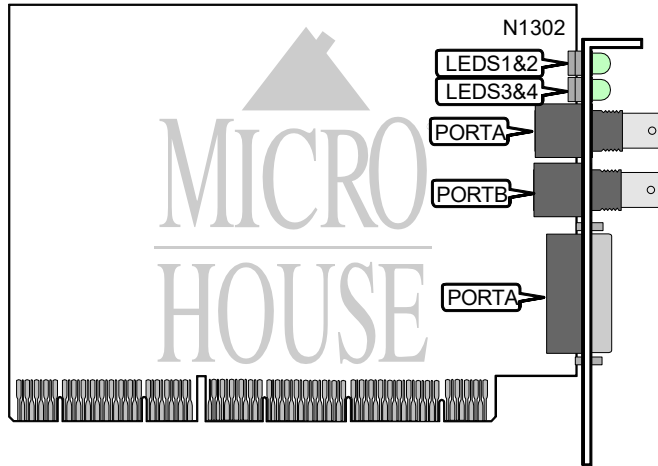

*Continued next page...*

**THE NETWORK INTERFACE CARD TECHNICAL GUIDE**  
**STANDARD MICROSYSTEMS CORPORATION**  
**ELITECARD PLUS ELITE32**

... continued from previous page.

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	Blinking	Data is being received (PortB)
LED1	Green	Off	Data is not being received (PortB)
LED2	Yellow	Blinking	Data is being received (PortA)
LED2	Yellow	Off	Data is not being received (PortA)
LED3	Green	Blinking	Data is being transmitted (PortB)
LED3	Green	Off	Data is not being transmitted (PortB)
LED4	Yellow	Blinking	Data is being transmitted (PortA)
LED4	Yellow	Off	Data is not being transmitted (PortA)