


Chapter 5: Jumper Settings
STANDARD MICROSYSTEMS CORPORATION
ETHEREZ SMC8416T

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Star
Wiring Type	Unshielded twisted pair
Boot ROM	Available

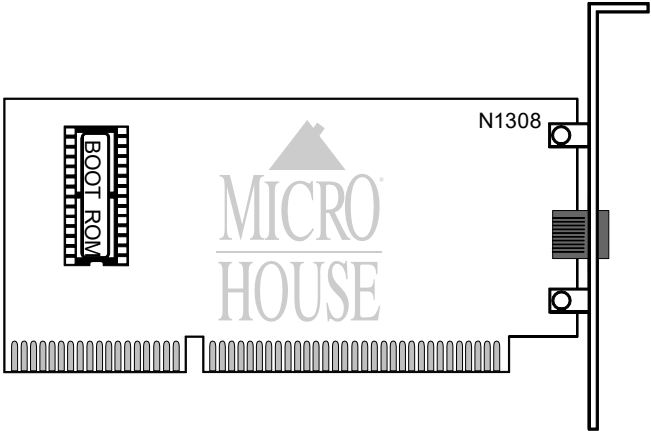

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	Blinking	Network connection is good
LED1	Green	Off	Network connection is broken
LED2	Amber	On	Data is being transmitted/received
LED2	Amber	Off	Data is not being transmitted/received
Note: On some models the LED's are integrated within the RJ-45 connector, on other models they are located on the bracket between the RJ-45 connector and the BNC connector.			