


Chapter 5: Jumper Settings
STANDARS MICROSYSTEMS CORPORATION
ETHEREZ SMC8416BT

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus/Star
Wiring Type	Unshielded twisted pair
	RG-58A/U 50ohm coaxial
Boot ROM	Available

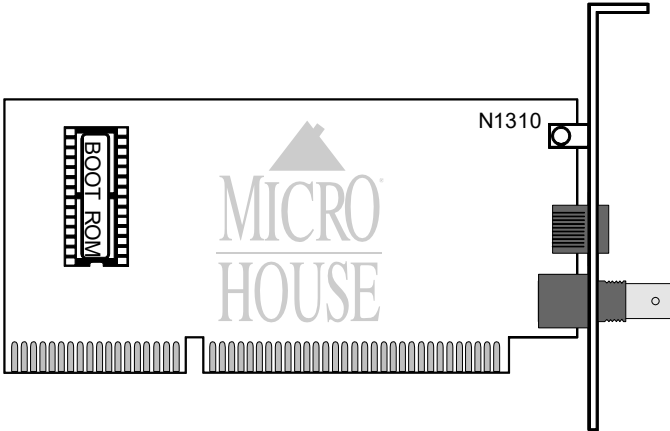

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	Blinking	10Base-T network connection is good
LED1	Green	Off	10Base-T network connection is broken
LED2	Amber	On	Data is being transmitted/received (10Base-T)
LED2	Amber	Off	Data is not being transmitted/received (10Base-T)
Note: On some models the LED's are integrated within the RJ-45 connector, on other models they are located on the bracket between the RJ-45 connector and the BNC connector.			