


Chapter 5: Jumper Settings
CNET TECHNOLOGY, INC.
C N 9 3 5

NIC Type	Ethernet
Transfer Rate	10/20Mbps
Data Bus	PCI
Topology	Linear Bus/Star
Wiring Type	Unshielded twisted pair
	RG-58A/U 50ohm coaxial
Boot ROM	Available (location unidentified)

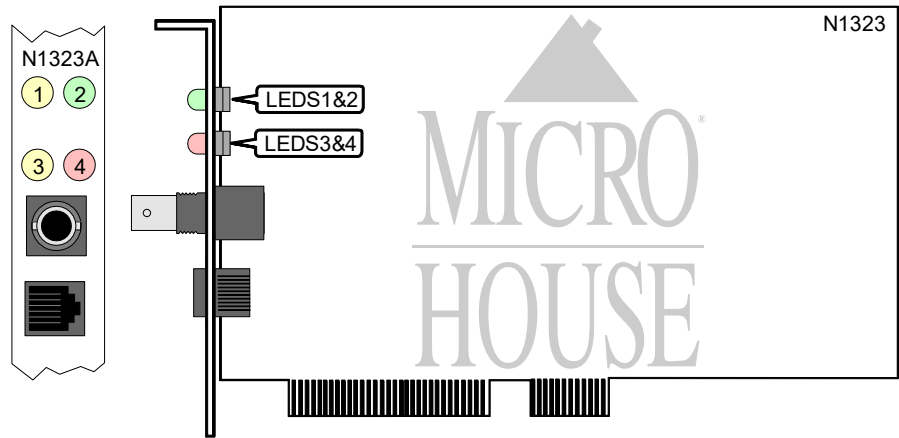

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Yellow	Blinking	Data is being transmitted
LED1	Yellow	Off	Data is not being transmitted
LED2	Green	On	Network connection is good
LED2	Green	Off	Network connection is broken
LED3	Yellow	On	Data is being received
LED3	Yellow	Off	Data is not being received
LED4	Red	On	Collision detected on network
LED4	Red	Off	Collision not detected on network