


MICRODYNE CORPORATION  
IRMATRAC 4/16

Card Type	Token Ring
Transfer Rate	4/16Mbps
Topology	Ring
Data Bus	16-bit ISA
Wiring Type	Shielded twisted pair
	Unshielded twisted pair
Boot ROM	Available (location unidentified)

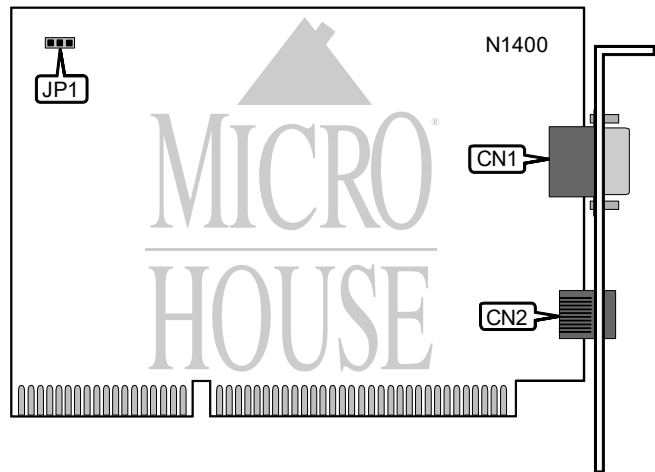

CONNECTIONS			
Function	Label	Function	Label
Shielded twisted pair	CN1	Unshielded twisted pair	CN2

USER CONFIGURABLE		
Function	Location	Setting
Power on activated (legacy mode)	JP1	Pins 1 & 2 closed
Power on deactivated ( non-legacy mode)	JP1	Pins 2 & 3 closed
Note: The location of Pin 1 is unidentified.		