MICRODYNE CORPORATION NE10/100 ISA


Ethernet **Card Type**

Maximum network Rate 10Mbps/100Mbps 16-bit ISA

Data Bus Topology Star

Wiring Type Boot ROM Unshielded twisted pair

Available

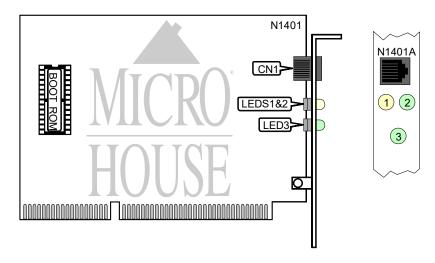

CONNECTIONS		
Function	Label	
10Base-T port	CN1	

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Yellow	Blinking	Data is being transmitted/received
LED1	Yellow	Off	Data is not being transmitted/received
LED2	Green	On	Network connection is good
LED2	Green	Off	Network connection is broken
LED3	Green	On	Card is operating at 100Mbps
LED3	Green	Off	Card is operating at 10Mbps