


SURECOM TECHNOLOGY CORPORATION

EP100VG

NIC Type	Ethernet
Network Transfer Rate	10/100Mbps
Data Bus	32-bit PCI
Topology	Star
Wiring Type	Unshielded twisted pair
Boot ROM	Available

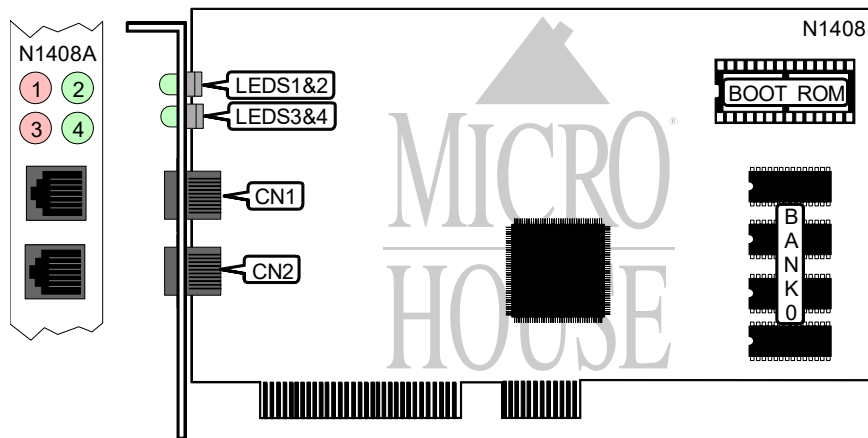

CONNECTIONS			
Function	Label	Function	Label
Unshielded twisted pair port (100Mbps)	CN1	Unshielded twisted pair port (10Mbps)	CN2

CACHE CONFIGURATION	
Size	BANK 0
128KB	(4) 256K x 1

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Red	On	100Mbps operation
LED1	Red	Off	10Mbps operation
LED2	Green	On	Network connection is good
LED2	Green	Off	Network connection is broken
LED3	Red	Blinking	Data is being transmitted
LED3	Red	Off	Data is not being transmitted
LED4	Green	Blinking	Data is being received
LED4	Green	Off	Data is not being received