


EDIMAX COMPUTER COMPANY

EN-5200PX

Card Type	Ethernet
Data Bus	32-bit PCI
Maximum Network Rate	10Mbps/20Mbps
Topology	Linear Bus/Star
Wiring Type	Unshielded twisted pair AUI transceiver via DB-15 port RG-58A/U 50ohm coaxial
Boot ROM	Available

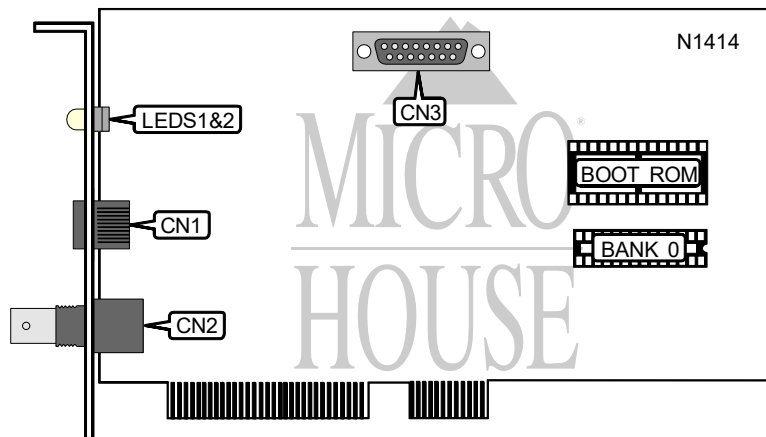

CONNECTIONS			
Function	Label	Function	Label
Unshielded twisted pair	CN1	AUI transceiver via DB-15 port	CN3
RG-58A/U 50ohm coaxial	CN2		

SRAM MEMORY CONFIGURATION	
Setting	BANK 0
32KB	(1) 32K x 8

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	10Base-T network connection is good
LED1	Off	10Base-T network connection is broken
LED2	On	Data is being transmitted/received
LED2	Off	Data is not being transmitted/received
Note: The exact location of LED1 and LED2 is unidentified.		