


PUREDATA PDE8023PLUS-32T

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	32-bit EISA
Topology	Star
Wiring Type	Unshielded twisted pair
Boot ROM	Available

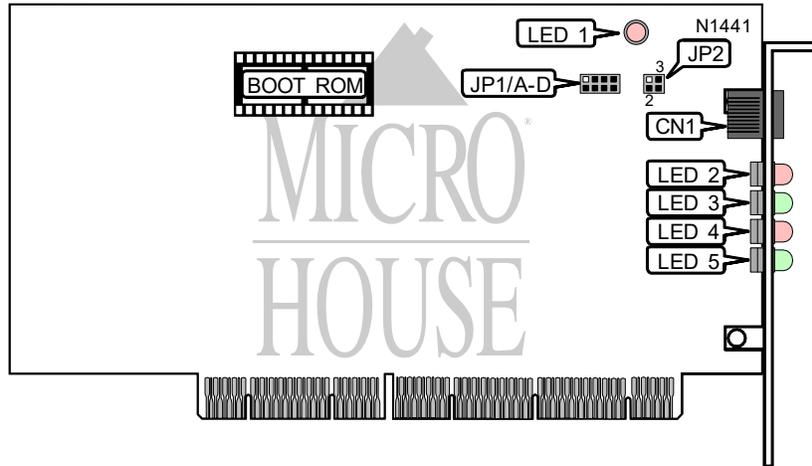

CONNECTIONS	
Function	Label
RJ-45/10BASE-T connector	CN1

WIRING TYPE SELECTION				
Setting	JP1/A	JP1/B	JP1/C	JP1/D
Software selectable	Closed	Open	Open	Open
10BASE-T	Open	Closed	Open	Open
10BASE5	Open	Open	Closed	Open
10BASE2	Open	Open	Open	Closed

LINK INTEGRITY	
Function	JP2
Link integrity function enabled	Pins 1 & 2 closed
Link integrity function disabled	Pins 3 & 4 closed

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED 1	Red	On	Network collision detected
LED 1	Red	Off	Network collision not detected
LED 2	Red	On	Communicating with local DTE
LED 2	Red	Off	Not communicating with local DTE
LED 3	Green	On	Network activity detected
LED 3	Green	Off	Network activity not detected
LED 4	Red	On	Polarity is reversed
LED 4	Red	Off	Polarity is normal
LED 5	Green	On	Link integrity is good
LED 5	Green	Off	Link integrity is broken