


PUREDATA PDE8023PLUS-32CA

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	32-bit EISA
Topology	Linear Bus
Wiring Type	AUI transceiver via DB-15 port RG-58A/U 50ohm coaxial
Boot ROM	Available

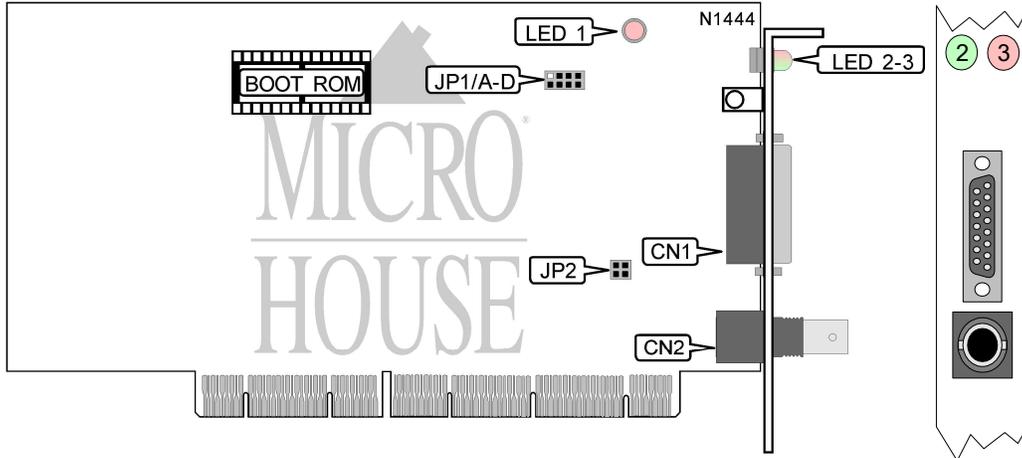

CONNECTIONS			
Function	Label	Function	Label
AUI/10BASE5	CN1	RG-58A/U 50ohm coaxial/10BASE2	CN2

WIRING TYPE SELECTION				
Setting	JP1/A	JP1/B	JP1/C	JP1/D
Software selectable	Closed	Open	Open	Open
10BASE-T	Open	Closed	Open	Open
10BASE5	Open	Open	Closed	Open
10BASE2	Open	Open	Open	Closed

NETWORK DISTANCE CONFIGURATION FOR 10BASE-2	
Distance	JP2
=<185 meters	Pins 1 & 2 closed
Extended segment lengths =<300 meters	Pins 3 & 4 closed

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED 1	Red	On	Network collision detected
LED 1	Red	Off	Network collision not detected
LED 2/3	Green	On	Network activity detected
LED 2/3	Green	Off	Network activity not detected
LED 2/3	Red	On	Communicating with local DTE
LED 2/3	Red	Off	Not communicating with local DTE