


TRENDWARE INTERNATIONAL, INC.

TE16PNPCT

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair
	RG-58A/U 50ohm coaxial
Boot ROM	Available

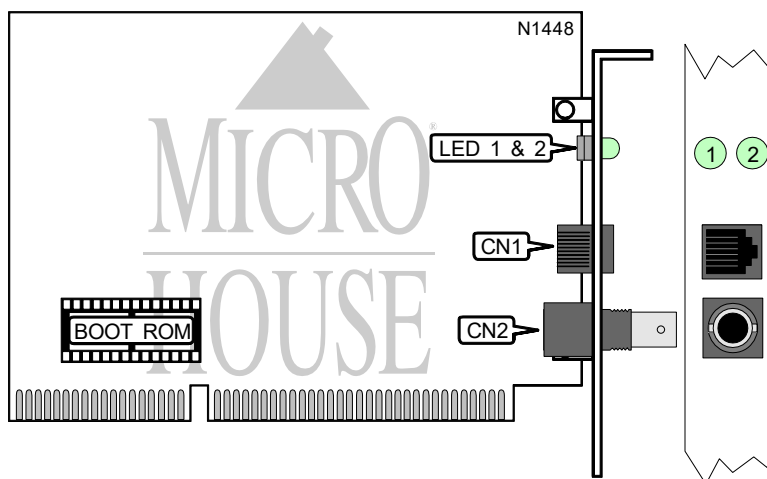

CONNECTIONS			
Function	Label	Function	Label
RJ-45 - 10BASE-T	CN1	RG-58A/U - 10BASE2	CN2

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED 1	Green	On	Power on
LED 1	Green	Off	Power off
LED 1	Green	Blinking	Data is being transmitted on UTP link
LED 2	Green	On	Link integrity exists
LED 2	Green	Off	Link integrity broken or no UTP connection
LED 2	Green	Blinking	Data is being received on UTP link

MISCELLANEOUS TECHNICAL NOTES
This is a Plug-N-Play card, and it will detect which slot (8 or 16-bit) the card uses.