


# LANTECH COMPUTER COMPANY

## E - N E T / 1 6 A

|                       |                                |
|-----------------------|--------------------------------|
| NIC Type              | Ethernet                       |
| Network Transfer Rate | 10Mbps                         |
| Data Bus              | 16-bit ISA                     |
| Topology              | Linear Bus, Star               |
| Wiring Type           | Unshielded twisted pair        |
|                       | AUI transceiver via DB-15 port |
|                       | RG-58A/U 50ohm coaxial         |
| Boot ROM              | Available                      |

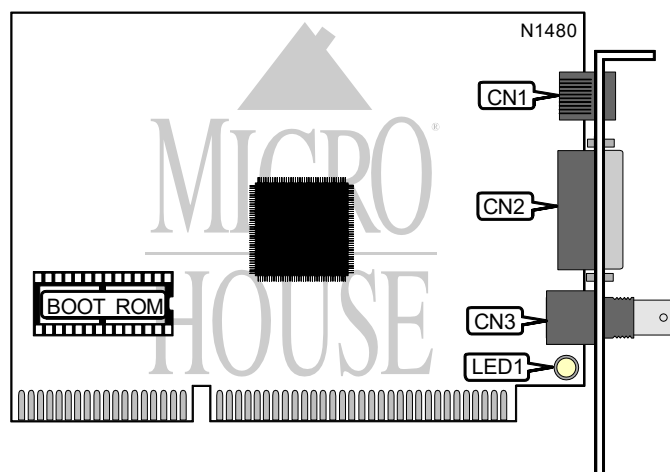

| CONNECTIONS                    |       |                             |       |
|--------------------------------|-------|-----------------------------|-------|
| Function                       | Label | Function                    | Label |
| Unshielded twisted pair port   | CN1   | RG-58A/U 50ohm coaxial port | CN3   |
| AUI transceiver via DB-15 port | CN2   |                             |       |

| DIAGNOSTIC LED(S) |        |  |
|-------------------|--------|--|
| LED               | Status | Condition                              |
| LED1              | On     | Data is being transmitted/received     |
| LED1              | Off    | Data is not being transmitted/received |