


LANTECH COMPUTER COMPANY

PCI-NET/32 COMBO

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	32-bit PCI
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair
	AUI transceiver via DB-15 port
	RG-58A/U 50ohm coaxial
Boot ROM	Available

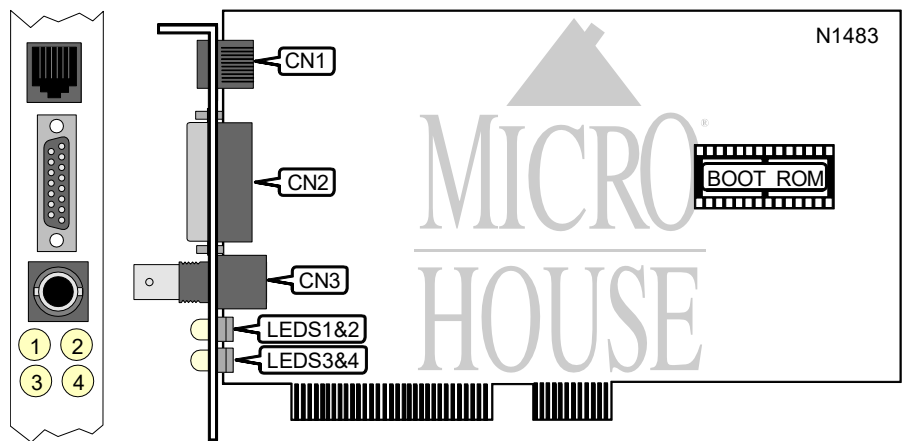

CONNECTIONS			
Function	Label	Function	Label
Unshielded twisted pair port	CN1	RG-58A/U 50ohm coaxial port	CN3
AUI transceiver via DB-15 port	CN2		

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Collision is detected on network
LED1	Off	Collision is not detected on network
LED2	Blinking	Data is being received
LED2	Off	Data is not being received
LED3	On	10Base-T network connection is good or 10Base-5 selected
LED3	Off	10Base-T network connection is broken or 10Base-5 not selected
LED4	Blinking	Data is being transmitted
LED4	Off	Data is not being transmitted