


KYE INTERNATIONAL CORPORATION

GE2000II-2

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair
	AUI transceiver via DB-15 port
	RG-58A/U 50ohm coaxial
Boot ROM	Available

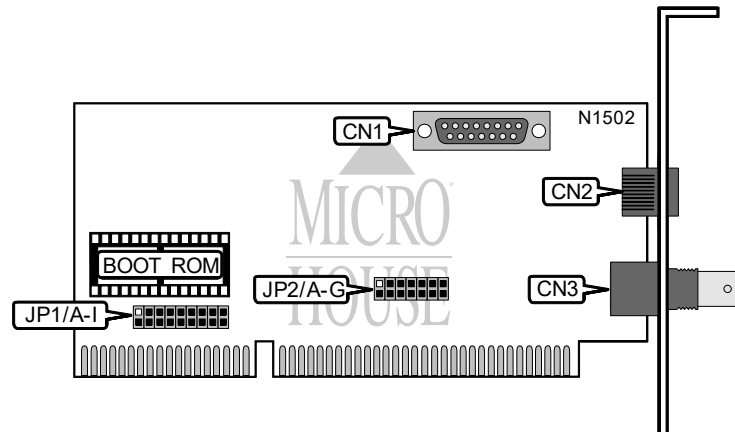

COPENNECTIONS			
Function	Label	Function	Label
AUI transceiver via DB-15 port	CN1	RG-58A/U 50ohm coaxial port	CN3
Unshielded twisted pair port	CN2		

BASE I/O ADDRESS SELECTION			
Address	JP2/A	JP2/B	JP2/C
200h	Open	Open	Closed
220h	Closed	Open	Closed
240h	Open	Closed	Closed
260h	Closed	Closed	Closed
300h	Open	Open	Open
320h	Closed	Open	Open
340h	Open	Closed	Open
360h	Closed	Closed	Open

INTERRUPT SELECTION									
IRQ	JP1/A	JP1/B	JP1/C	JP1/D	JP1/E	JP1/F	JP1/G	JP1/H	JP1/I
Jumperless	Open	Open	Open	Open	Open	Open	Open	Open	Closed
2	Open	Open	Open	Open	Open	Open	Open	Closed	Open
3	Open	Open	Open	Open	Open	Open	Closed	Open	Open
4	Open	Open	Open	Open	Open	Closed	Open	Open	Open
5	Open	Open	Open	Open	Closed	Open	Open	Open	Open
10	Open	Open	Open	Closed	Open	Open	Open	Open	Open
11	Open	Open	Closed	Open	Open	Open	Open	Open	Open
12	Open	Closed	Open	Open	Open	Open	Open	Open	Open
15	Closed	Open	Open	Open	Open	Open	Open	Open	Open

Continued on next page. . .

KYE INTERNATIOPENAL CORPORATIOOPEN

GE2000II-2

. . . Continued from previous page

BOOT ROM COPENFIGURATIOOPEN	
Setting	JP2
Enabled	Closed
Disabled	Open

BOOT ROM JUMPER COPENFIGURATIOOPEN				
Setting	JP2/D	JP2/E	JP2/F	JP2/G
C000h	Open	Open	Open	Closed
C400h	Closed	Open	Open	Closed
C800h	Open	Closed	Open	Closed
CC00h	Closed	Closed	Open	Closed
í D000h	Open	Open	Closed	Closed
D400h	Closed	Open	Closed	Closed
D800h	Open	Closed	Closed	Closed
DC00h	Closed	Closed	Closed	Closed