


KYE INTERNATIONAL CORPORATION

GE2000 PNP

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair
	AUI transceiver
	RG-58A/U 50ohm coaxial
Boot ROM	Available

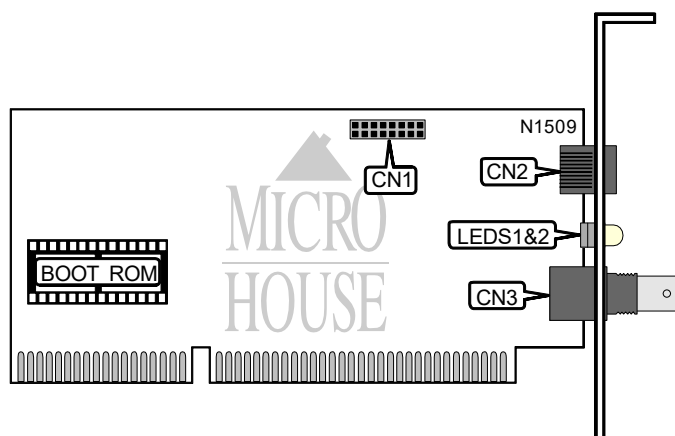

CONNECTIONS			
Function	Label	Function	Label
AUI transceiver	CN1	RG-58A/U 50ohm coaxial port	CN3
Unshielded twisted pair port	CN2		

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	10Base-T network connection is good
LED1	Green	Off	10Base-T network connection is broken
LED2	Amber	Blinking	Data is being transmitted/received
LED2	Amber	Off	Data is not being transmitted/received