


# KATRON TECHNOLOGIES, INC.

## DP 1612

NIC Type	100VG (Ethernet compatible)
Network Transfer Rate	10/100Mbps
Data Bus	16-bit ISA
Topology	Star
Wiring Type	Unshielded twisted pair
Boot ROM	Available

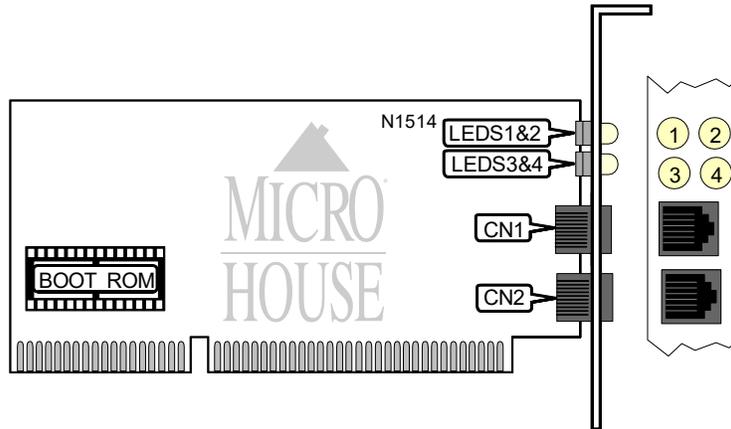

CONNECTIONS			
Function	Label	Function	Label
Unshielded twisted pair port (100VG)	CN1	Unshielded twisted pair port (10Base-T)	CN2

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	100Mbps operation is selected
LED1	Off	100Mbps operation is not selected
LED2	On	10Mbps operation is selected
LED2	Off	10Mbps operation is not selected
LED3	On	Network connection is good
LED3	Off	Network connection is broken
LED4	On	Data is being transmitted/received
LED4	Off	Data is not being transmitted/received