


PUREDATA PDE80212-32 EISA

NIC Type	Ethernet
Network Transfer Rate	100Mbps
Data Bus	32-bit EISA
Topology	Star
Wiring Type	Unshielded twisted pair
Boot ROM	Available

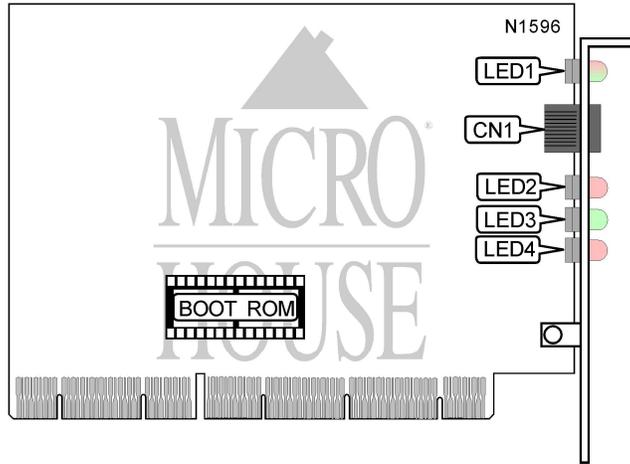

CONNECTIONS	
Function	Label
Unshielded twisted pair port	CN1

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Red	On	Network connection is broken
LED1	Green	On	Network connection is good
LED1	Red or Green	Off	Power is off
LED2	Red	On	Data is being transmitted
LED2	Red	Off	Data is not being transmitted
LED3	Green	On	Data is being received
LED3	Green	Off	Data is being received
LED4	Amber	On	Polarity is reversed
LED4	Amber	Off	Polarity is not reversed