


# PUREDATA PDE80212-32 PCI

NIC Type	Ethernet
Network Transfer Rate	10/100Mbps
Data Bus	32-bit PCI
Topology	Star
Wiring Type	Unshielded twisted pair
Boot ROM	Available (location unidentified)

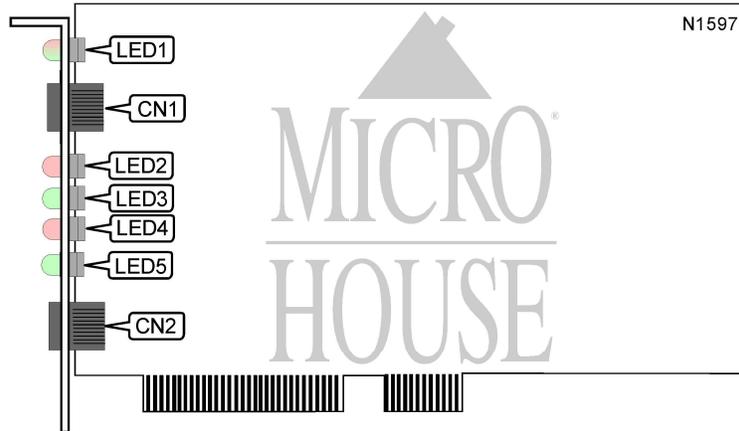

CONNECTIONS			
Function	Label	Function	Label
Unshielded twisted pair port (100VG)	CN1	Unshielded twisted pair port (10Base-T)	CN2

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Red	On	100VG network connection is broken
LED1	Green	On	100VG network connection is good
LED1	Red or Green	Off	100VG port not selected
LED2	Red	On	Data is being transmitted
LED2	Red	Off	Data is not being transmitted
LED3	Green	On	Data is being received
LED3	Green	Off	Data is being received
LED4	Amber	On	Polarity is reversed
LED4	Amber	Off	Polarity is not reversed
LED5	Green	On	10Base-T network connection is good
LED5	Green	Off	10Base-T port not selected