3COM CORPORATION
ETHERLINK III (3C592-TPO)

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	32-bit EISA
Topology	Star
Wiring Type	Unshielded twisted pair
Boot ROM	Available (location unidentified)
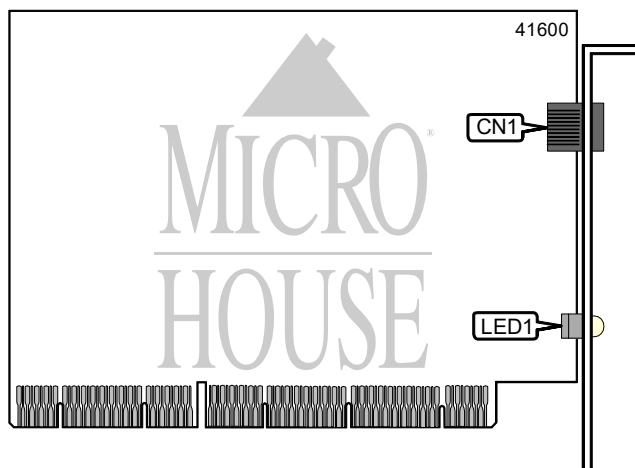
CONNECTIONS	
Function	Label
Unshielded twisted pair	CN1

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Network connection is good
LED1	Blinking	Polarity is reversed
LED1	Off	Network connection is broken
Note: When you first install the adapter and power up the computer, the LED lights, but the network connection is not active. For the network connection to be good you need to run the Group 3 test or have loaded the network drivers.		