


DTK COMPUTER, INC.

PCI-003 ETHERNET II

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	32-bit PCI
Topology	Linear Bus, Star
Wiring Type	Shielded twisted pair
	RG-58A/U 50ohm coaxial
Boot ROM	Available

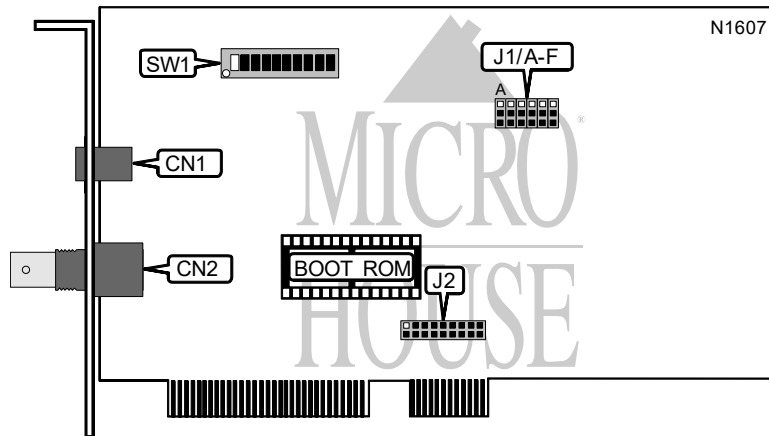

CONNECTIONS			
Function	Label	Function	Label
Shielded twisted pair port	CN1	RG-58A/U 50ohm coaxial port	CN2
Note: The locations of CN1 and CN2 are unidentified.			

BASE I/O ADDRESS SELECTION					
Address	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5
200	On	Off	Off	Off	Off
220	On	Off	Off	Off	On
300	On	On	Off	Off	Off
320	On	On	Off	Off	On
3E0	On	On	On	On	On

INTERRUPT SELECTION					
IRQ	J2/A	J2/B	J2/C	J2/D	J2/E
2	Closed	Open	Open	Open	Open
3	Open	Closed	Open	Open	Open
4	Open	Open	Closed	Open	Open
5 normal	Open	Open	Open	Closed	Open
5 I/O fetch	Open	Open	Open	Open	Closed
Note: The location of JP2/A is unidentified.					

DMA SELECTION				
DMA	J2/F	J2/G	J2/H	J2/I
1	Open	Closed	Open	Closed
3	Closed	Open	Closed	Open
Note: The location of JP2/A is unidentified.				

Continued on next page. . .

DTK COMPUTER, INC.

PCI-003 ETHERNET II

. . . continued from previous page

CABLE TYPE SELECTION	
Type	J1/A-F
i RG-58A/U 50ohm coaxial	Pins 2 & 3 closed
Shielded twisted pair	Pins 1 & 2 closed

PROM ADDRESS SELECTION				
Address	SW1/6	SW1/7	SW1/8	SW1/9
C000h	Off	Off	Off	Off
C400h	On	Off	Off	Off
C800h	Off	On	Off	Off
i CC00h	On	On	Off	Off
D000h	Off	Off	On	Off
D400h	On	Off	On	Off
D800h	Off	On	On	Off
DC00h	On	On	On	Off
E000h	Off	Off	Off	On
E400h	On	Off	Off	On
E800h	Off	On	Off	On
EC00h	On	On	Off	On
F000h	Off	Off	On	On
F400h	On	Off	On	On
F800h	Off	On	On	On
FC00h	On	On	On	On

TECHNICAL NOTE
Note: The orientation of the card is unknown.