


# NATIONAL SEMICONDUCTOR CORPORATION

## NE2000PLUS-CTA

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair
	AUI transceiver via DB-15 port
	RG-58A/U 50ohm coaxial
Boot ROM	Available

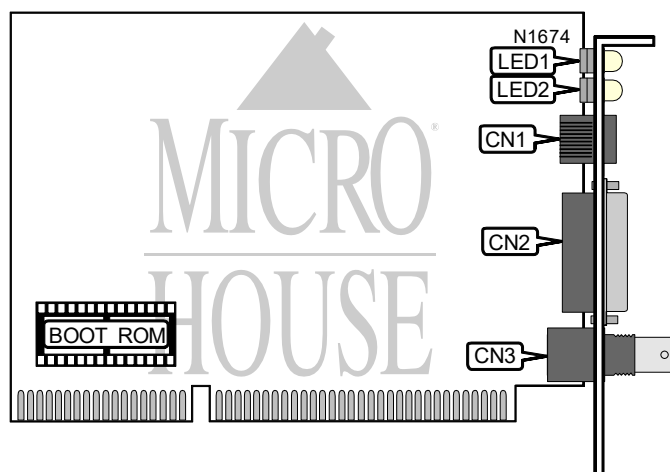

CONNECTIONS			
Function	Label	Function	Label
Unshielded twisted pair port	CN1	RG-58A/U 50ohm coaxial port	CN3
AUI transceiver via DB-15 port	CN2		

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Polarity is good on 10Base-T
LED1	Off	Polarity is broken on 10Base-T
LED2	On	10Base-T network connection is good
LED2	Off	10Base-T network connection is broken
<b>Note:</b> The locations of LED1 and LED2 is unidentified.		