


NATIONAL SEMICONDUCTOR CORPORATION

NE2000PLUS-T

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Star
Wiring Type	Unshielded twisted pair
Boot ROM	Available

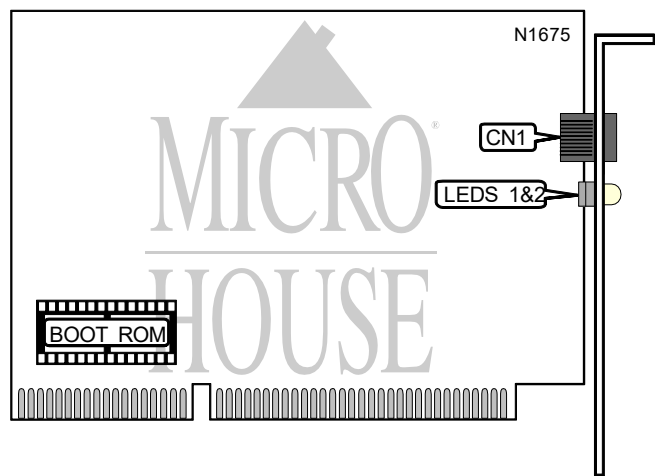

CONNECTIONS		
Function		Label
Unshielded twisted pair port		CN1

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Polarity is good
LED1	Off	Polarity is broken
LED2	On	Network connection is good
LED2	Off	Network connection is broken
Note: The locations of LED1 and LED2 is unidentified.		