


# WESTERN DIGITAL CORPORATION ETHERCARD PLUS10T

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	8-bit ISA
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair
	AUI transceiver via DB-15 port
Boot ROM	Available

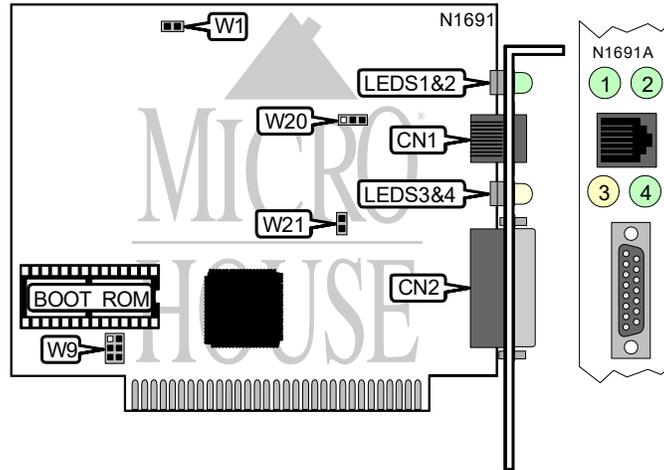

CONNECTIONS			
Function	Label	Function	Label
Unshielded twisted pair port	CN1	AUI transceiver via DB-15 port	CN2

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
Clear configuration disabled	W1	Open	
Clear configuration enabled	W1	Closed	
Automatic polarity correction enabled	W20	Pins 1 & 2 closed	
Automatic polarity correction disabled	W20	Pins 2 & 3 closed	
Link integrity test enabled	W21	Open	
Link integrity test disabled	W21	Closed	

ROM SIZE SELECTION	
Size	W9
16KB	Pins 1 & 2, 4 & 5 closed
32KB	Pins 2 & 3, 4 & 5 closed
64KB	Pins 2 & 3, 5 & 6 closed

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	Polarity is good on 10Base-T
LED1	Green	Off	Polarity is broken on 10Base-T
LED2	Green	On	10Base-T Link Integrity mode is selected
LED2	Green	Off	10Base-T Link integrity mode is not selected
LED3	Yellow	On	Data is being transmitted
LED3	Yellow	Off	Data is not being transmitted
LED4	Green	On	Data is being received
LED4	Green	Off	Data is not being received