


HEWLETT-PACKARD COMPANY
HP J2577A

NIC Type	Ethernet
Network Transfer Rate	10/100Mbps
Data Bus	16-bit ISA
Topology	Star
Wiring Type	Unshielded twisted pair
Boot ROM	Available (location unidentified)

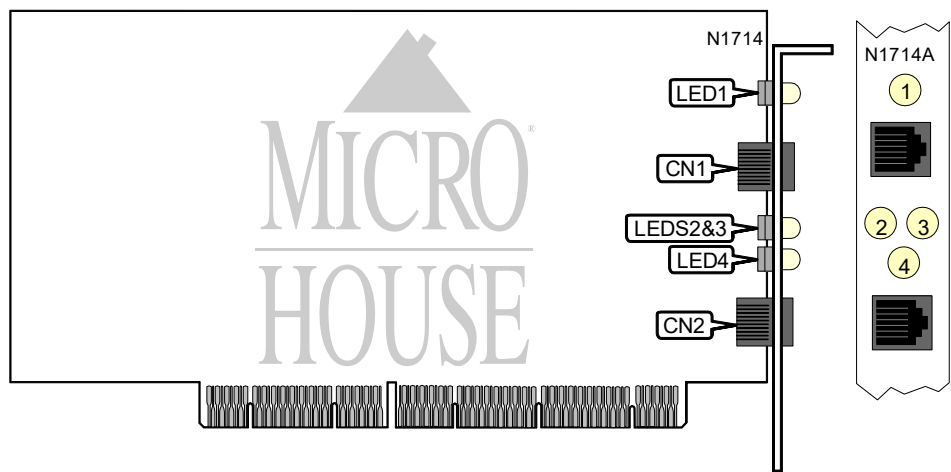

CONNECTIONS			
Function	Label	Function	Label
Unshielded twisted pair port (100Mbps)	CN1	Unshielded twisted pair port (10Mbps)	CN2

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	100Mbps connection is selected
LED1	Off	100Mbps connection is not selected
LED2	On	Network connection is good
LED2	Off	Network connection is broken
LED3	On	Data is being transmitted/received
LED3	Off	Data is not being transmitted/received
LED4	On	10Mbps connection is selected
LED4	Off	10Mbps connection is not selected

TECHNICAL NOTE
Note: The transfer rate on CN1 and CN2 can be opposite, if so the purpose of LED1 and LED4 will be opposite.