


HEWLETT-PACKARD COMPANY
HP J3171A

NIC Type	Ethernet
Network Transfer Rate	10/100Mbps
Data Bus	PCI
Topology	Star
Wiring Type	Unshielded twisted pair
Boot ROM	Available (location unidentified)

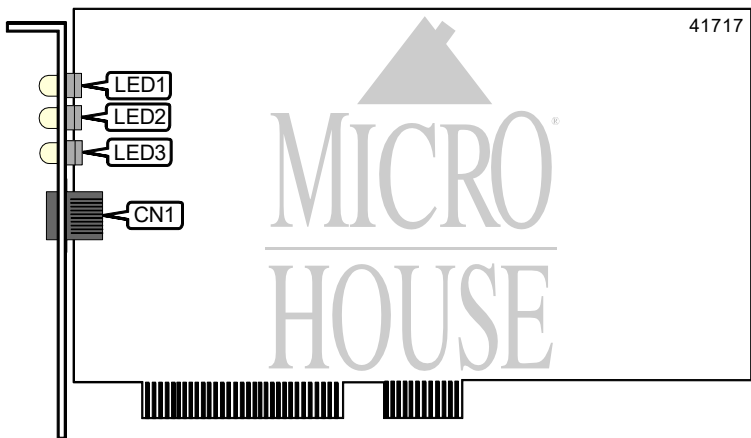

CONNECTIONS	
Function	Label
Unshielded twisted pair	CN1

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	10Base-T network connection is good
LED1	Off	10Base-T network connection is broken
LED2	On	Data is being transmitted/received
LED2	Off	Data is not being transmitted/received
LED3	On	100Base-TX network connection is good
LED3	Off	100Base-TX network connection is broken