


HEWLETT-PACKARD COMPANY  
HP 27252A

|                       |                                                          |
|-----------------------|----------------------------------------------------------|
| NIC Type              | Ethernet                                                 |
| Network Transfer Rate | 10Mbps                                                   |
| Data Bus              | 16-bit ISA                                               |
| Topology              | Linear Bus                                               |
| Wiring Type           | DB-15 port AUI transceiver via<br>RG-58A/U 50ohm coaxial |
| Boot ROM              | Available                                                |

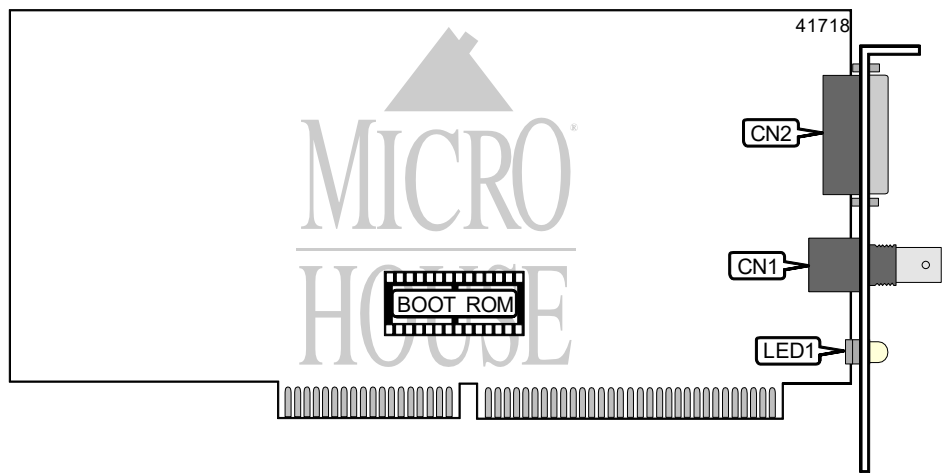

| CONNECTIONS            |       |                                |       |
|------------------------|-------|--------------------------------|-------|
| Function               | Label | Function                       | Label |
| RG-58A/U 50ohm coaxial | CN1   | AUI transceiver via DB-15 port | CN2   |

| DIAGNOSTIC LED(S) |        |                                       |
|-------------------|--------|---------------------------------------|
| LED               | Status | Condition                             |
| LED1              | On     | 10Base-2 network connection is good   |
| LED1              | Off    | 10Base-2 network connection is broken |