


HEWLETT-PACKARD COMPANY
HP 27247B

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair
	AUI transceiver via DB-15 port
Boot ROM	Available

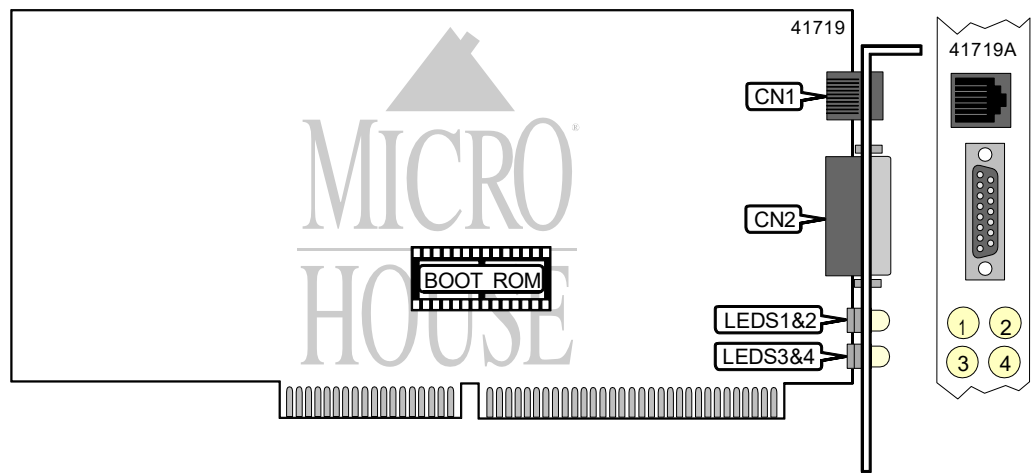

CONNECTIONS			
Function	Label	Function	Label
Unshielded twisted pair port	CN1	AUI transceiver via DB-15 port	CN2

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	10Base-5 is active
LED1	Off	10Base-5 is not active
LED2	On	Network connection is good
LED2	Off	Network connection is broken
LED3	On	Data is being transmitted
LED3	Off	Data is not being transmitted
LED4	On	Data is being received
LED4	Off	Data is not being received