


WESTERN DIGITAL CORPORATION

STARCARD PLUS

NIC Type	Ethernet (StarLan)
Maximum Onboard Memory	8KB DRAM
Data Bus	8-bit ISA
Network Transfer Rate	1Mbps
Topology	Linear Bus
Wiring Type	Unshielded twisted pair (1Base-5)
Boot ROM	Not available

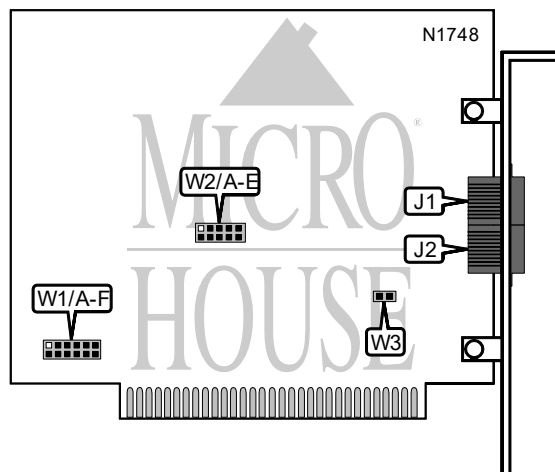

CONNECTIONS			
Function	Label	Function	Label
Unshielded twisted pair for telephone wiring	J1	Standard unshielded twisted pair	J2

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
í Four wait states	W2/A	Open
Two wait states	W2/A	Closed
í Line filter enabled	W3	Closed
Line filter disabled	W3	Open

INTERRUPT						
Setting	W1/A	W1/B	W1/C	W1/D	W1/E	W1/F
IRQ2	Open	Open	Open	Open	Open	Closed
í IRQ3	Open	Open	Open	Open	Closed	Open
IRQ4	Open	Open	Open	Closed	Open	Open
IRQ5	Open	Open	Closed	Open	Open	Open
IRQ6	Open	Closed	Open	Open	Open	Open
IRQ7	Closed	Open	Open	Open	Open	Open

Continued on next page. . .

WESTERN DIGITAL CORPORATION

STARCARD PLUS

. . . continued from previous page

BASE I/O ADDRESS				
Setting	W2/B	W2/C	W2/D	W2/E
200h	Closed	Closed	Closed	Closed
220h	Open	Closed	Closed	Closed
240h	Closed	Open	Closed	Closed
260h	Open	Open	Closed	Closed
280h	Closed	Closed	Open	Closed
2A0h	Open	Closed	Open	Closed
2C0h	Closed	Open	Open	Closed
2E0h	Open	Open	Open	Closed
300h	Closed	Closed	Closed	Open
320h	Open	Closed	Closed	Open
340h	Closed	Open	Closed	Open
360h	Open	Open	Closed	Open
380h	Closed	Closed	Open	Open
3A0h	Open	Closed	Open	Open
3C0h	Closed	Open	Open	Open
3E0h	Open	Open	Open	Open