


OVISLINK TECHNOLOGIES CORPORATION

LE-8019RB (REV. 3.0)

NIC Type	Ethernet
Boot ROM	Available
Network Transfer Rate	10Mbps
Topology	Linear Bus
Wire Type	RG-58A/U 50ohm coaxial
Data Bus	16-bit ISA
Card Size	Half height, half length

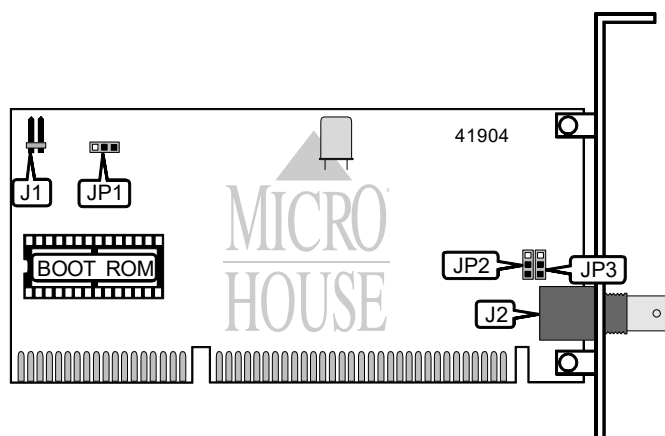

CONNECTIONS			
Function	Label	Function	Label
External transmit/receive LED connector	J1	RG-58A/U 50ohm coaxial connector	J2

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
Card is configured for software configuration	JP1	Pins 2 & 3 closed
Card is configured for Plug-N-Play	JP1	Pins 1 & 2 closed
Maximum coaxial cable length is 185 meters	JP2	Pins 2 & 3 closed
Maximum coaxial cable length is 300 meters	JP2	Pins 1 & 2 closed
Coaxial connector is not terminated	JP3	Pins 2 & 3 closed
Coaxial connector is terminated	JP3	Pins 1 & 2 closed

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
J1	N/A	Blinking	Card is transmitting or receiving data
J1	N/A	Off	Card is not transmitting or receiving data