


OVISLINK TECHNOLOGIES CORPORATION

LE-8019R3 (REV. 3.0)

NIC Type	Ethernet
Boot ROM	Available
Network Transfer Rate	10Mbps
Topology	Linear Bus/Star
Wire Type	Unshielded twisted pair
	AUI transceiver via DB-15 port
	RG-58A/U 50ohm coaxial
Data Bus	16-bit ISA
Card Size	Full height, half length

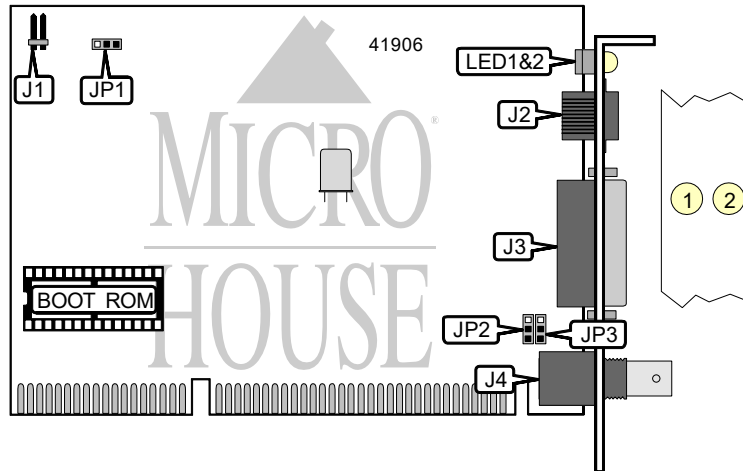

CONNECTIONS			
Function	Label	Function	Label
External transmit/receive LED connector	J1	AUI transceiver via DB-15 port	J3
UTP connector	J2	RG-58A/U 50ohm coaxial connector	J4

USER CONFIGURABLE SETTINGS			
Setting	Label	Position	
Card is configured for software configuration	JP1	Pins 2 & 3 closed	
Card is configured for Plug-N-Play	JP1	Pins 1 & 2 closed	
Maximum coaxial cable length is 185 meters	JP2	Pins 2 & 3 closed	
Maximum coaxial cable length is 300 meters	JP2	Pins 1 & 2 closed	
Coaxial connector is not terminated	JP3	Pins 2 & 3 closed	
Coaxial connector is terminated	JP3	Pins 1 & 2 closed	

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
J1	N/A	Blinking	Card is transmitting or receiving data
J1	N/A	Off	Card is not transmitting or receiving data
LED1	Unidentified	On	No valid network signal detected
LED1	Unidentified	Off	Valid network signal detected
LED2	Unidentified	On	Network connection is good
LED2	Unidentified	Blinking	Network connection is intermittent
LED2	Unidentified	Off	Network connection is broken