


# OVISLINK TECHNOLOGIES CORPORATION

## LFE-8139TX V.R

<b>NIC Type</b>	Ethernet
<b>Boot ROM</b>	Available
<b>Network Transfer Rate</b>	10Mbps/100Mbps
<b>Topology</b>	Star
<b>Wire Type</b>	Unshielded twisted pair
<b>Data Bus</b>	32-bit PCI
<b>Card Size</b>	Half height, half length

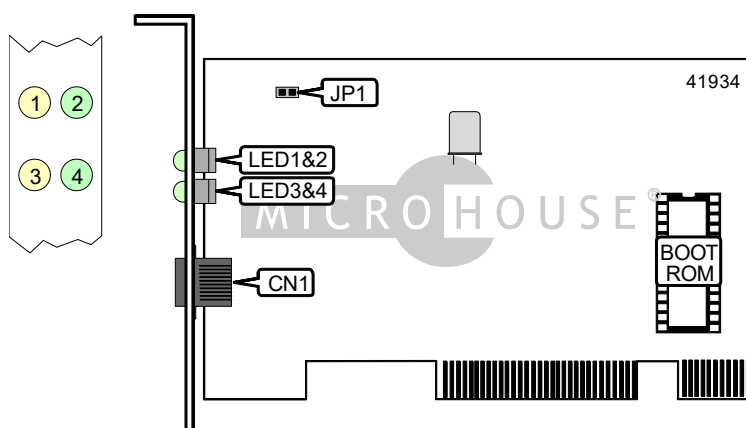

CONNECTIONS			
Function	Label	Function	Label
UTP connector	J1	External LED connector	JP1

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Yellow	On	Network connection is good
LED1	Yellow	Off	Network connection is broken
LED2	Green	On	Full-duplex mode enable
LED2	Green	Off	Half-duplex mode enabled
LED3	Yellow	Blinking	Data is being transmitted/received
LED3	Yellow	Off	Data is not being transmitted/received
LED4	Green	On	Power on
LED4	Green	Off	Power off