DIGITAL EQUIPTMENT CORPORATION
A T M W O R K S   3 5 1   A D A P T E R   U T P

Card Type	Network adapter card
NIC Type	ATM
Maximum Onboard Memory	Unidentified
Boot ROM	Not available
Network Transfer Rate	155Mbps
Topology	Star
Wiring Type	RJ-45 unshielded twisted pair
Data Bus	32-bit PCI
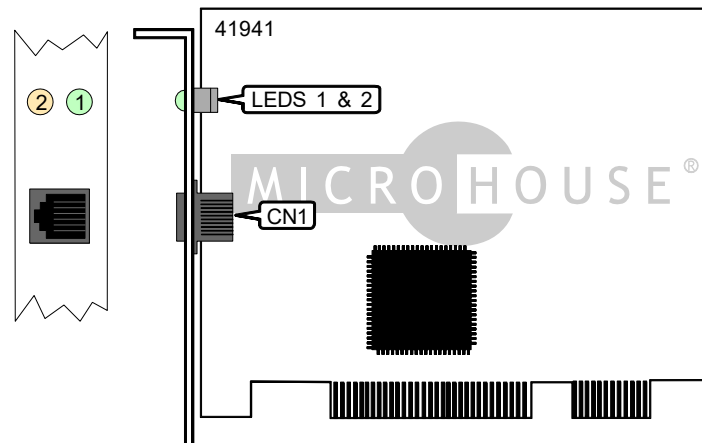
CONNECTIONS	
Function	Label
RJ-45 unshielded twisted pair connector	CN1

DIAGNOSTIC LEDS		
LED 1	LED 2	Condition
Off	Off	Power is not being received or ARM works driver is not loaded
Green	Any status	ATM works driver is loaded. Module status OK
Amber	Amber	Adapter is in reset mode
Amber	Off	Diagnostics failed
Green/Off	Green	Network connection is good
Green/Off	Amber	Network connection is broken
Note: LED 1 is the module status indicator. LED 2 is the network status indicator. LEDs are on when displaying a color.		