


KATRON TECHNOLOGIES, INC.

KF-221TX, KF-221TX/2

Card Type	Network Interface Card
NIC Type	Ethernet
Maximum Onboard Memory	Unidentified
Boot ROM	Unidentified
Network Transfer Rate	10Mbps, 100Mbps
Topology	Star bus
Wiring Type	Unshielded twisted pair
Data Bus	32-bit PCI

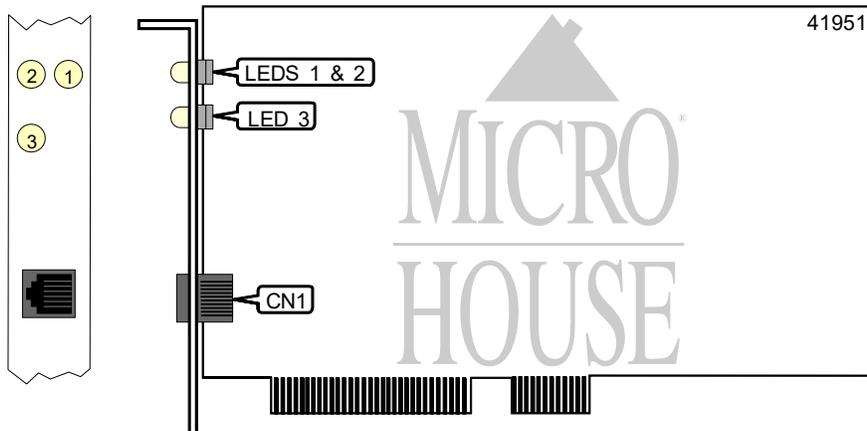

CONNECTIONS	
Function	Label
UTP connector	CN1

NETWORK SPEED SELECTION

For 10BASE-T Ethernet networks, the Fast Ethernet adapter uses Category 3, 4, or 5 UTP cable. To establish a valid 10 Mbps connection, the cable must be connected to a 10BASE-T hub.

For 100BASE-TX Ethernet networks, the Fast Ethernet adapter uses Category 5 UTP cable. To establish a valid 100 Mbps connection, the cable must be connected to a 100BASE-TX hub.

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	100BASE-TX connection is selected and active
LED1	Off	100BASE-TX connection is not selected and active
LED2	On	10BASE-TX connection is selected and active
LED2	Off	10BASE-TX connection is not selected and active
LED3	Blinking	Network traffic is present and is transmitting/receiving
LED3	Off	Network traffic is not present and is not transmitting/receiving for either speed