


KATRON TECHNOLOGIES, INC.

ET16/P-S2

Card Type	Network Interface Card
NIC Type	Ethernet
Maximum Onboard Memory	16 Kb
Boot ROM	Available
Network Transfer Rate	10Mbps
Topology	Linear Bus, Star
Wiring Type	Unshielded twisted pair
	AUI transceiver via DB-15 port
	RG-58A/U 50ohm coaxial
Data Bus	8-bit ISA/16-bit ISA

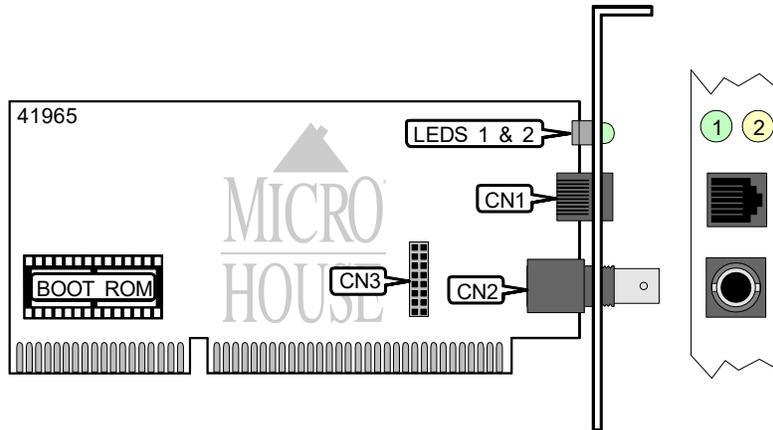

CONNECTIONS			
Function	Label	Function	Label
UTP connector	CN1	AUI bracket connector	CN3
RG-58A/U	CN2		

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	UTP link is good
LED1	Green	Off	UTP link is broken
LED2	Yellow	Blinking	Network data is being transmitted/received
LED2	Yellow	Off	No data is being transmitted/received
LED2	Yellow	On	Adapter failure