


KATRON TECHNOLOGIES, INC.

DP - 200

Card Type	Network Interface Card
NIC Type	Ethernet
Maximum Onboard Memory	Unidentified
Boot ROM	Available
Network Transfer Rate	100Mbps/10Mbps
Topology	Star bus
Wiring Type	Unshielded twisted pair
Data Bus	32-bit PCI

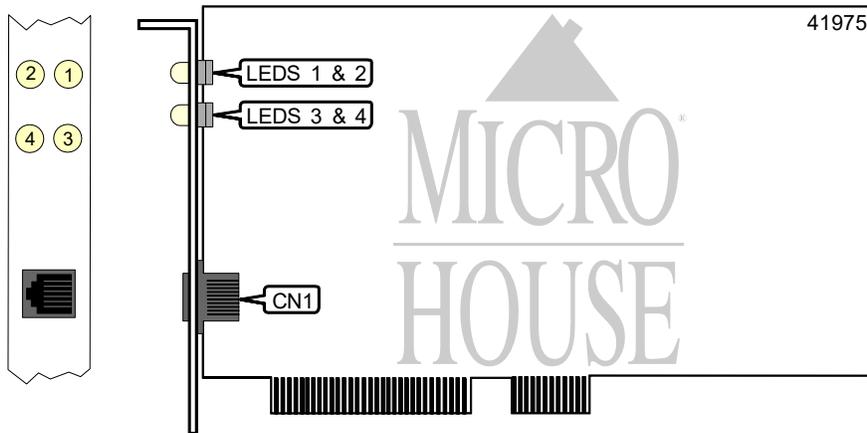

CONNECTIONS	
Function	Label
UTP connector	CN1

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Data is being transmitted/received between adapter and 100BASE-TX hub.
LED1	Off	Data is not being transmitted/received between adapter and 100BASE-TX hub.
LED2	On	Data is being transmitted/received between adapter and 10BASE-T hub.
LED2	Off	Data is not being transmitted/received between adapter and 10BASE-T hub.
LED3	On	Data is being transmitted/received between adapter and hub.
LED3	Off	Data is not being transmitted/received between adapter and hub.
LED4	Blinking	Network traffic is present
LED4	Off	No traffic for either speed