


DIGITAL EQUIPMENT CORPORATION

FIBER-OPTIC SAS CONTROLLER (DEFPA-AA), FIBER-OPTIC SAS ADAPTER (DEFPA-AB)

Card Type	Network Interface Card
NIC Type	FDDI
Maximum Onboard Memory	Unidentified
Boot ROM	Unidentified
Network Transfer Rate	100Mbps
Topology	Ring
Wiring Type	Fiber optic cable
Data Bus	32-bit PCI

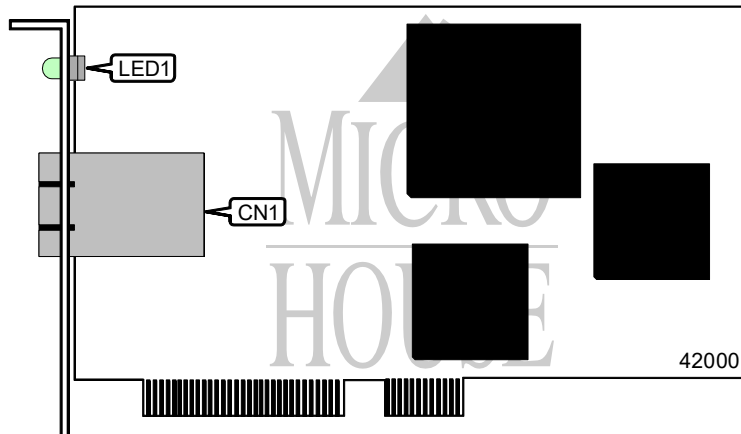

CONNECTIONS	
Function	Label
Fiber-optic connector - duplex SC	CN1

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	Network connection is good
LED1	Green	Blinking	Network connection in progress
LED1	Green	Off	Network connection is broken
LED1	Red	On	See Note
LED1	Red	Blinking	Illegal topology
LED1	Red	Off	Network connection is broken
Note: If LED1 is red and on after system boots, indicates broken port or Link Confidence Test (LCT) failure; retry loop. If LED1 is red and on before system boots, indicates self-test failure.			