ALLIED TELESYN, INC. AT-1720AT

Card Type

NIC Type Maximum Onboard Memory

Boot ROM

Network Transfer Rate


Topology Wiring Type Network Interface Card

Ethernet Unidentified Available 10Mbps

Linear Bus, Star Shielded twisted pair Unshielded twisted pair

AUI transceiver via DB-15 port

Data Bus MCA

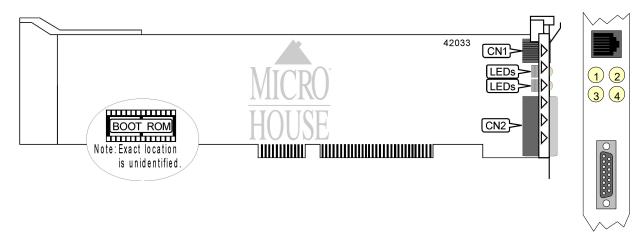

| CONNECTIONS | | | | |
|---------------------|-------|--------------------------------|-------|--|
| Function | Label | Function | Label | |
| RJ-45, Twisted pair | CN1 | AUI transceiver via DB-15 port | CN2 | |

| DIAGNOSTIC LED(S) | | | |
|-------------------|--------|--------|----------------------------------|
| LED | Color | Status | Condition |
| TX | Green | On | Data is being transmitted |
| TX | Green | Off | Data is not being transmitted |
| RX | Yellow | On | Data is being received |
| RX | Yellow | Off | Data is not being received |
| LNK | Green | On | Link integrity is good |
| LNK | Green | Off | Link integrity is broken |
| COL | Yellow | On | Collision detected on network |
| COL | Yellow | Off | No collision detected on network |