


ALLIED TELESYN, INC.
AT-2450AT

Card Type	Network Interface Card
NIC Type	Ethernet
Network Transfer Rate	10Mbps
Topology	Linear Bus, Star
Wiring Type	Shielded twisted pair
	Unshielded twisted pair
	AUI transceiver via DB-15 port
Data Bus	32-bit PCI

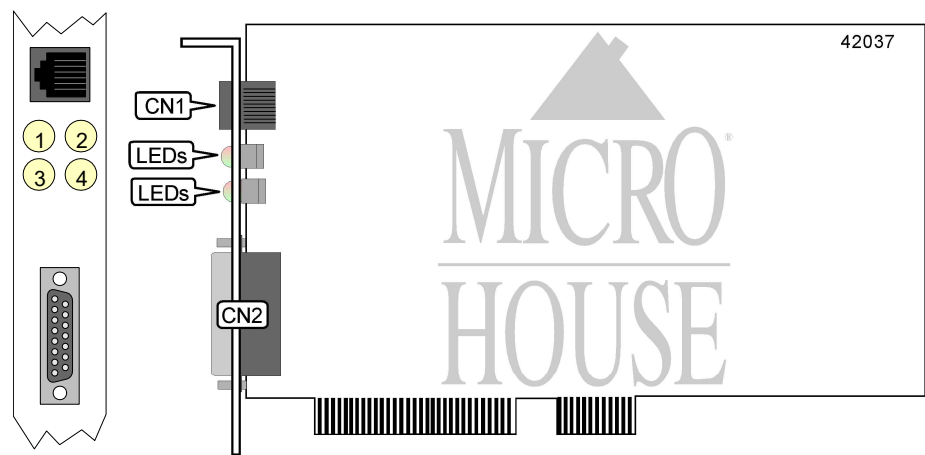

CONNECTIONS			
Function	Label	Function	Label
RJ-45, Twisted pair	CN1	AUI transceiver via DB-15 port	CN2

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	Data is being transmitted
LED2	Green	Off	Data is not being transmitted
LED2	Yellow	On	Data is being received
LED2	Yellow	Off	Data is not being received
LED3	Green	On	Link integrity is good
LED3	Green	Off	Link integrity is broken
LED4	Yellow	On	Collision detected on network
LED4	Yellow	Off	No collision detected on network