


IBM CORPORATION

TOKEN-RING 16/4 ISA-16

Card Type	Network Interface Card
NIC Type	Token Ring
Maximum Onboard Memory	Unidentified
Boot ROM	Available
Network Transfer Rate	10Mbps
Topology	Ring
Wiring Type	Shielded twisted pair
	Unshielded twisted pair
Data Bus	8/16-bit ISA

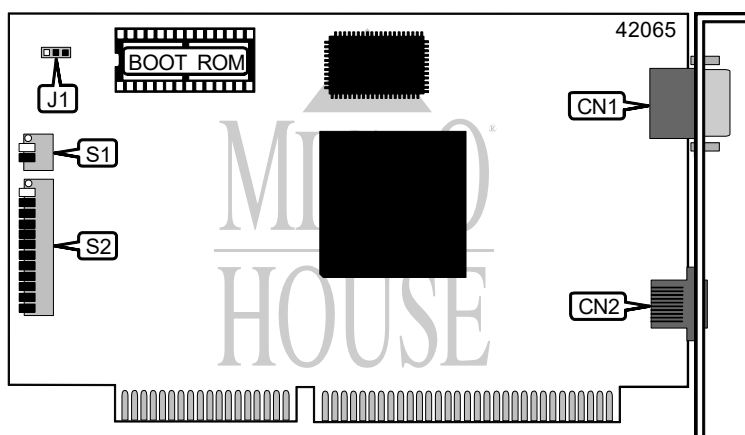

CONNECTIONS			
Function	Label	Function	Label
DB-9 Shielded twisted pair connector	CN1	RJ-45 Unshielded twisted pair connector	CN2

USER CONFIGURABLE SETTINGS		
Function	Label	Position
8-bit ISA bus enabled	J1	Pins 1 & 2 closed
16-bit ISA bus enabled	J1	Pins 2 & 3 closed
í Shielded twisted pair cable enabled	S1/1	On
Unshielded twisted pair cable enabled	S1/1	Off
í Remote Program Load enabled	S1/2	On
Remote Program Load disabled	S1/2	Off
í Primary adapter enabled	S2/9	Off
Alternate adapter enabled	S2/9	On
í Data rate at 16 Mbps	S2/12	Off
Data rate at 4 Mbps	S2/12	On

Continued on next page. . .

IBM CORPORATION

TOKEN RING 16/4 ISA-16

. . . continued from previous page

ROM ADDRESS SELECT						
Address	S2/1	S2/2	S2/3	S2/4	S2/5	S2/6
C0000	Off	On	On	On	On	On
C2000	Off	On	On	On	On	Off
C4000	Off	On	On	On	Off	On
C6000	Off	On	On	On	Off	Off
C8000	Off	On	On	Off	On	On
CA000	Off	On	On	Off	On	Off
í CC000	Off	On	On	Off	Off	On
CE000	Off	On	On	Off	Off	Off
D0000	Off	On	Off	On	On	On
D2000	Off	On	Off	On	On	Off
D4000	Off	On	Off	On	Off	On
D6000	Off	On	Off	On	Off	Off
D8000	Off	On	Off	Off	On	On
DA000	Off	On	Off	Off	On	Off
DC000	Off	On	Off	Off	Off	On
DE000	Off	On	Off	Off	Off	Off

IRQ SELECT		
IRQ	S2/7	S2/8
í 2	On	On
3	On	Off
6	Off	On
7	Off	Off

SHARED RAM SELECT		
Size	S2/10	S2/11
8KB	On	On
í 16KB	Off	On
32KB	On	Off
64KB	Off	Off