


IBM CORPORATION

TOKEN-RING 4MBPS

Card Type	Network Interface Card
NIC Type	Token Ring
Maximum Onboard Memory	Unidentified
Boot ROM	Available
Network Transfer Rate	10Mbps
Topology	Ring
Wiring Type	Shielded twisted pair
Data Bus	8-bit ISA

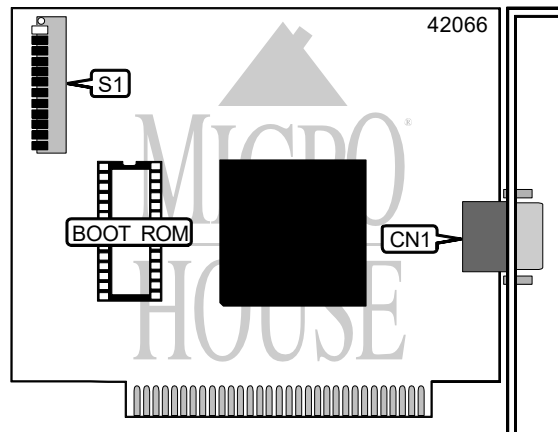

CONNECTIONS	
Function	Label
DB-9 Shielded twisted pair connector	CN1

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Primary adapter enabled	S1/9	Off
Alternate adapter enabled	S1/9	On
Factory configured - do not alter.	S1/11	On
Factory configured - do not alter.	S1/12	On

Continued on next page. . .

IBM CORPORATION

TOKEN RING 4MBPS

. . . continued from previous page

ROM ADDRESS SELECT						
Address	S1/1	S1/2	S1/3	S1/4	S1/5	S1/6
C0000	Off	On	On	On	On	On
C2000	Off	On	On	On	On	Off
C4000	Off	On	On	On	Off	On
C6000	Off	On	On	On	Off	Off
C8000	Off	On	On	Off	On	On
CA000	Off	On	On	Off	On	Off
i CC000	Off	On	On	Off	Off	On
CE000	Off	On	On	Off	Off	Off
D0000	Off	On	Off	On	On	On
D2000	Off	On	Off	On	On	Off
D4000	Off	On	Off	On	Off	On
D6000	Off	On	Off	On	Off	Off
D8000	Off	On	Off	Off	On	On
DA000	Off	On	Off	Off	On	Off
DC000	Off	On	Off	Off	Off	On
DE000	Off	On	Off	Off	Off	Off

IRQ SELECT		
IRQ	S1/7	S1/8
i 2	On	On
3	On	Off
6	Off	On
7	Off	Off

Note: Do not use interrupt 6.

SHARED RAM SELECT		
Size	Label	Position
8KB	S1/10	On
16KB	S1/10	Off